




EL 1.5HTH




Pitch:5.08(5.00) mm

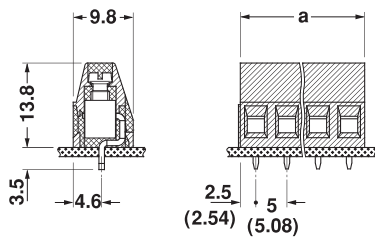

EL 1.5HTH2L




Pitch:5.08(5.00) mm



EL 1.5HTH3R



Pitch:5.08 mm

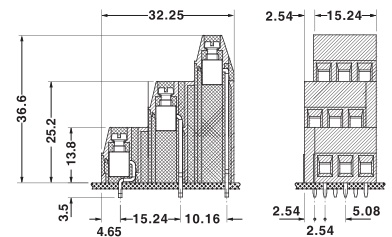

Each position with 2 poles

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-2.5	0.14-1.5	26-14	24	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-2.5	0.14-1.5	26-14	24	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30-14

位数/No. of positions	订货型号/Order No.
2	EL 1.5HTH-2-5.00
3	EL 1.5HTH-3-5.00
2	EL 1.5HTH-2-5.08
3	EL 1.5HTH-3-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-2.5	0.14-1.5	26-14	24	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-2.5	0.14-1.5	26-14	24	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30-14

位数/No. of positions	订货型号/Order No.
2	EL 1.5HTH2L-2-5.00
3	EL 1.5HTH2L-3-5.00
2	EL 1.5HTH2L-2-5.08
3	EL 1.5HTH2L-3-5.08

Each position with 3 poles

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-2.5	0.14-1.5	26-14	24	250
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	250 320 630				
额定冲击电压(KV)	4				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-/Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	Ø1.3				
引脚尺寸(mm)	0.9x0.9				

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	30-14

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-2.5	0.14-1.5	26-14	24	250
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	250 320 630				
Rate impulse Voltage(KV)	4				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-/Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	Ø1.3				
Pin Dimensions(mm)	0.9x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	30-14

位数/No. of positions	订货型号/Order No.
2	EL 1.5HTH3R-2-5.08
3	EL 1.5HTH3R-3-5.08