


BL 2.5H




Pitch:7.62(7.5) mm

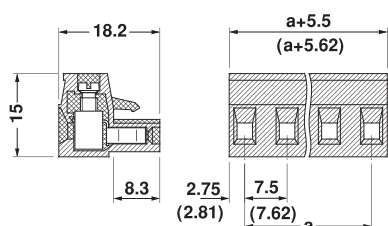


BL 2.5HF




Pitch:7.62(7.5) mm

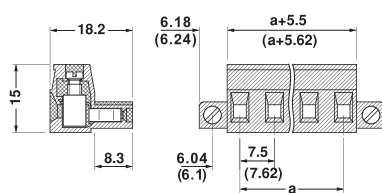

BL 2.5V

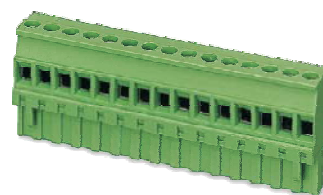

Pitch:7.62(7.5) mm

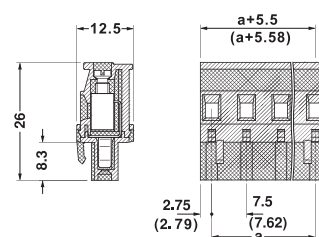

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-2.5	0.2-2.5	24-12	12	400
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	400 630 1000				
额定冲击电压(KV)	6				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-2.5	0.2-2.5	24-12	12	400
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	400 630 1000				
Rate impulse Voltage(KV)	6				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30-12

位数/No. of positions	订货型号/Order No.
2	BL 2.5H-2-7.5
...	...
12	BL 2.5H-12-7.5
2	BL 2.5H-2-7.62
...	...
12	BL 2.5H-12-7.62

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-2.5	0.2-2.5	24-12	12	400
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	400 630 1000				
额定冲击电压(KV)	6				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	300/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-2.5	0.2-2.5	24-12	12	400
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	400 630 1000				
Rate impulse Voltage(KV)	6				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	300/15	30-12

位数/No. of positions	订货型号/Order No.
2	BL 2.5HF-2-7.5
...	...
12	BL 2.5HF-12-7.5
2	BL 2.5HF-2-7.62
...	...
12	BL 2.5HF-12-7.62

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-2.5	0.2-2.5	24-12	12	400
绝缘材料组别	I				
污染等级	3 2 2				
过电压类别	III III II				
额定电压(V)	400 630 1000				
额定冲击电压(KV)	6				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M3/0.5-0.6				
剥线长度(mm)	7				
线路板孔径(mm)	\				
引脚尺寸(mm)	\				

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
	600/15	30-12

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-2.5	0.2-2.5	24-12	12	400
Insulating Material Group	I				
Pollution degree	3 2 2				
Overvoltage Category	III III II				
Rate Voltage(V)	400 630 1000				
Rate impulse Voltage(KV)	6				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M3/0.5-0.6				
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\				
Pin Dimensions(mm)	\				

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
	600/15	30-12

位数/No. of positions	订货型号/Order No.
2	BL 2.5V-2-7.5
...	...
12	BL 2.5V-12-7.5
2	BL 2.5V-2-7.62
...	...
12	BL 2.5V-12-7.62