


BL 2.5RMV




Pitch:5.08 mm



BL 2.5RMVF



Pitch:5.08 mm

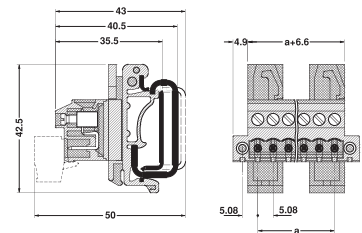

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-2.5	0.2-2.5	24-12	12	250
绝缘材料组别				I	
污染等级				3	2
过电压类别				III	II
额定电压(V)				250	320
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(-Nm)				M3/0.5-0.6	
剥线长度(mm)				7	
线路板孔径(mm)				\	
引脚尺寸 (mm)				\	

UL 数据				
额定电压(V)/电流(A)			300/15	
压线范围(AWG)			30-12	

IEC	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-2.5	0.2-2.5	24-12	12	250
Insulating Material Group				I	
Pollution degree				3	2
Oversvoltage Category				III	II
Rate Voltage(V)				260	320
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(-Nm)				M3/0.5-0.6	
Stripping length(mm)				7	
PCB Hole Diameter(mm)				\	
Pin Dimensions(mm)				\	

UL Technical Data				
Rate Voltage(V)/Current(A)			300/15	
Wire Range(AWG)			30-12	

位数/No. of positions	订货型号/Order No.
2	BL 2.5RMV-2-5.08
...	...
24	BL 2.5RMV-24-5.08

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2-2.5	0.2-2.5	24-12	12	250
绝缘材料组别				I	
污染等级				3	2
过电压类别				III	II
额定电压(V)				250	320
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(-Nm)				M3/0.5-0.6	
剥线长度(mm)				7	
线路板孔径(mm)				\	
引脚尺寸 (mm)				\	

UL 数据				
额定电压(V)/电流(A)			300/15	
压线范围(AWG)			30-12	

IEC	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2-2.5	0.2-2.5	24-12	12	250
Insulating Material Group				I	
Pollution degree				3	2
Oversvoltage Category				III	II
Rate Voltage(V)				260	320
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(-Nm)				M3/0.5-0.6	
Stripping length(mm)				7	
PCB Hole Diameter(mm)				\	
Pin Dimensions(mm)				\	

UL Technical Data				
Rate Voltage(V)/Current(A)			300/15	
Wire Range(AWG)			30-12	

位数/No. of positions	订货型号/Order No.
2	BL 2.5RMVF-2-5.08
...	...
24	BL 2.5RMVF-24-5.08