


BSC 4H



BSC 4HF




Pitch:7.62 mm



S 4HG




Pitch:7.62 mm

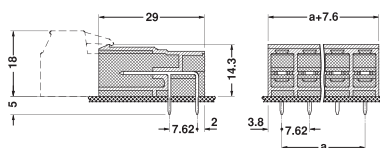

S 4VG



Pitch:7.62 mm



IEC 数据	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	AWG	I (A)	U (V)
连接数据	0.2-4	0.2-4	24-10	20	400
绝缘材料组别				I	
污染等级	3			2	2
过电压类别	III			III	II
额定电压(V)	400			630	1000
额定冲击电压(KV)				6	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(-Nm)				M3/0.5-0.6	
剥线长度(mm)	7				
线路板孔径(mm)	\			\	
引脚尺寸(mm)	\			\	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/20	
压线范围(AWG)		30-10

IEC Technical Data	Rigid (mm <sup>2</sup> )	flexible (mm <sup>2</sup> )	AWG	I (A)	U (V)
Connection data	0.2-4	0.2-4	24-10	20	400
Insulating Material Group				I	
Pollution degree	3			2	2
Overvoltage Category	III			III	II
Rate Voltage(V)	400			630	1000
Rate impulse Voltage(KV)				6	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(-Nm)				M3/0.5-0.6	
Stripping length(mm)	7				
PCB Hole Diameter(mm)	\			\	
Pin Dimensions(mm)	\			\	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/20	
Wire Range(AWG)		30-10

位数/No. of positions	订货型号/Order No.
2	BSC 4H-2-7.62
...	...
12	BSC 4H-12-7.62

IEC 数据	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	AWG	I (A)	U (V)
连接数据	\	\	\	20	400
绝缘材料组别				III a	
污染等级	3			2	2
过电压类别	III			III	II
额定电压(V)	400			630	630
额定冲击电压(KV)				6	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)	\			\	
线路板孔径(mm)	\			Ø1.3	
引脚尺寸(mm)	\			1x0.8	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/20	
压线范围(AWG)		\

IEC Technical Data	Rigid (mm <sup>2</sup> )	flexible (mm <sup>2</sup> )	AWG	I (A)	U (V)
Connection data	\	\	\	20	400
Insulating Material Group				III a	
Pollution degree	3			2	2
Overvoltage Category	III			III	II
Rate Voltage(V)	400			630	630
Rate impulse Voltage(KV)				6	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)	\			\	
PCB Hole Diameter(mm)	\			Ø1.3	
Pin Dimensions(mm)	\			1x0.8	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/20	
Wire Range(AWG)		\

位数/No. of positions	订货型号/Order No.
2	S 4HG-2-7.62
...	...
12	S 4HG-12-7.62

IEC 数据	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	AWG	I (A)	U (V)
连接数据	\	\	\	20	400
绝缘材料组别				III a	
污染等级	3			2	2
过电压类别	III			III	II
额定电压(V)	400			630	630
额定冲击电压(KV)				6	
绝缘材料/阻燃等级 UL 94				PBT/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)	\			\	
线路板孔径(mm)	\			Ø1.3	
引脚尺寸(mm)	\			1x0.8	

UL 数据	额定电压(V)/电流(A)	压线范围(AWG)
额定电压(V)/电流(A)	300/20	
压线范围(AWG)		\

IEC Technical Data	Rigid (mm <sup>2</sup> )	flexible (mm <sup>2</sup> )	AWG	I (A)	U (V)
Connection data	\	\	\	20	400
Insulating Material Group				III a	
Pollution degree	3			2	2
Overvoltage Category	III			III	II
Rate Voltage(V)	400			630	630
Rate impulse Voltage(KV)				6	
Insulating material/Inflammability Class				PBT/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)	\			\	
PCB Hole Diameter(mm)	\			Ø1.3	
Pin Dimensions(mm)	\			1x0.8	

UL Technical Data	Rate Voltage(V)/Current(A)	Wire Range(AWG)
Rate Voltage(V)/Current(A)	300/20	
Wire Range(AWG)		\

位数/No. of positions	订货型号/Order No.
2	S 4VG-2-7.62
...	...
12	S 4VG-12-7.62