
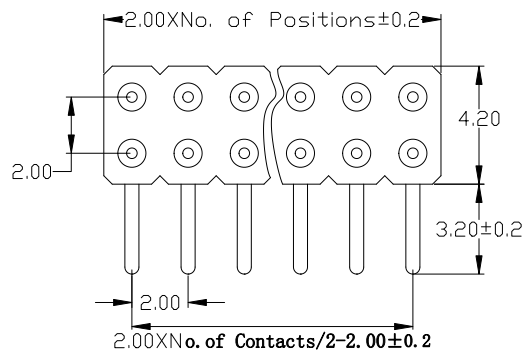


Right angle pin connector:solder tail
single row
Availability from:2 to 40 contacts
Standard number of contacts 40

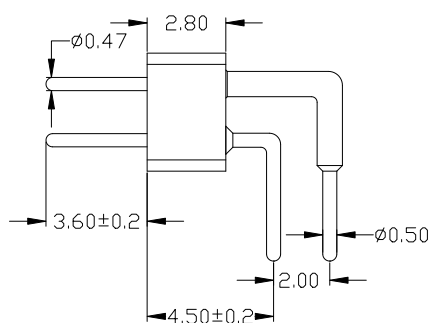

Right angle pin connector:solder tail
double row
Availability from:4 to 80 contacts
Standard number of contacts 80

Ordering Information

RP228-X XX X X X R AXX

HEIGHT OF HOUSING	1:Single-Row 2: Dual-Row 28:2.8mm	NO. OF PINS PER ROW	0:No Pitch 1:1.27 2:2.00 3:2.54 4:7.62 5:10.16 6:15.24 7:22.86	A=1u" B=2u" C=5u" D=10u" E=15u" F=30u"	A:PBT B:PA6T C:PA9T D:LCP G:PPS	LENGTH OF TERMINAL
				S=Ordinary Tin Plated H=Half gold plated Tin		

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
Flammability : UL94V-0
Sleeve : Brass CuZn 36Pb3(36000)
Mating pin ϕ : 0.45 mm
Mechanical life : min 500 cycles
Rated current : 1Amp
Contact resistance: Max 10m Ω
Dielectric resistance : Min 1000V_{RMS}

上海高霖电子有限公司

卢小强 PART NO. RP228-XXXXXXRXXX1
TITLE: 2.0圆孔排针 塑高2.8 90度
Customer No.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	SCALE	Fit
					X.X ±0.25	UNIT	MM
					X.XX ±0.20	SIZE	A4
					X.XXX ±0.10	SHEET	1/1
					Angle ±3°	CHECK	
					DIM TOL	PROJ.	APPROVE