
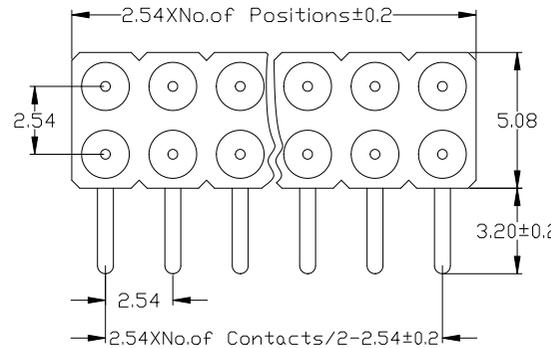


Right angle pin connector:solder tail,  
single row  
Availability from:2 to 40 contacts  
Standard number of contacts 20, 25,  
32 and 40

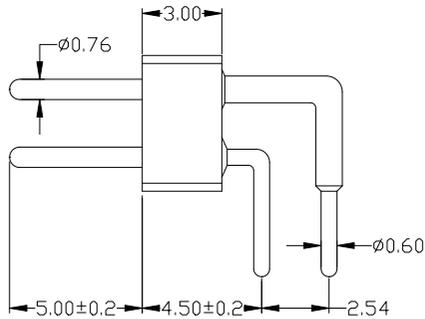

Right angle pin connector:solder tail,  
double row  
Availability from:4 to 80 contacts  
Standard number of contacts 20, 40,  
56, 60 and 72

### Ordering Information

RP130-X XX X X X R AXX

2

HEIGHT OF HOUSING	1:Single-Row 2: Dual-Row 3:Three Rows of	NO. OF PINS PER ROW	0:No Pitch 1:1.27 2:2.00 3:2.54 4:7.62 5:10.16 6:15.24 7:22.86	A=1u" B=2u" C=5u" D=10u" E=15u" F=30u"	A:PBT B:PA6T C:PA9T D:LCP G:PPS H=Half gold plated Tin	LENGTH OF TERMINAL
30:3.0mm		1~40P 2~40P				

### Specifications

Insulator : Black glass filled polyester PPS-GF30-FR  
 Flammability : UL94V-0  
 Sleeve : Brass CuZn 36Pb3(36000)  
 Mating pin Ø : 0.76 mm  
 Mechanical life : min 500 cycles  
 Rated current : 3Amp  
 Contact resistance: Max 10mΩ  
 Dielectric resistance : Min 1000V<sub>RMS</sub>

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强      PART NO. RP130-XXXXXXRXXX1 TITLE: 2.54圆孔排针 塑高3.0 90度 Customer No.	
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN			
				X.XXX	±0.10	SHEET	1/1	CHECK			
				Angle	±3°	PROJ.	☉	APPROVE			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL					