
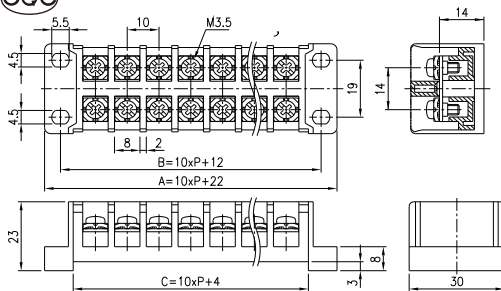



T3020C-1-□P



定格 Rating	AC300V 20A
適合電線 Applicable Wire	2mm ²
本体材質 Body Material	PBT G30%
連接方式 Connection	M3.5 Screw- M3.5 Screw
短路片 ShortPlate	PR3-129-□P PR3-30-90

極數	P	2	3	4	5	6	7	8	9	10	11	12
全長	A	42	52	62	72	82	92	102	112	122	132	142
固定孔距	B	32	42	52	62	72	82	92	102	112	122	132


T3052-□-□P

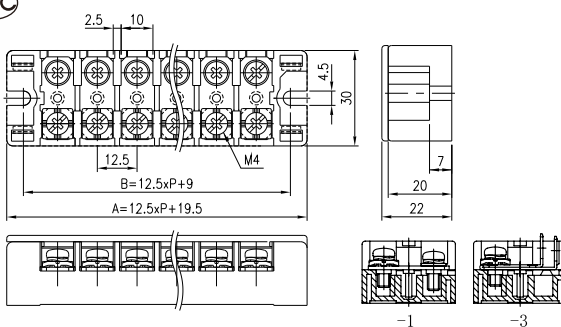

定格 Rating	AC300V 30A/25A
適合電線 Applicable Wire	3.5mm ²
本体材質 Body Material	PBT G30%
連接方式 Connection	M4 Screw- M4 Screw M4 Screw- #250 Tab

極數	P	2	3	4	5	6	7	8	9	10	11	12
全長	A	44.5	57.0	69.5	82.0	94.5	107.5	119.5	132.0	144.5	157.0	169.5
固定孔距	B	34.0	46.5	59.0	71.5	84.0	96.5	109.0	121.5	134.0	146.5	159.0


T3061-□-□P

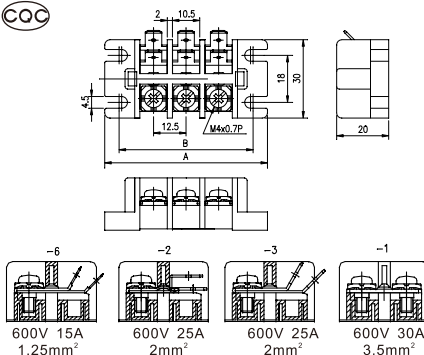

定格 Rating	AC300V 30A
適合電線 Applicable Wire	3.5mm ²
本体材質 Body Material	PBT G30%
連接方式 Connection	M4 Screw- M4 Screw M4 Screw- #187Tab(2) M4 Screw- #250 Tab(2)

極數	P	2	3	4	5	6	7	8	9	10	11	12
全長	A	50	62.5	75	87.5	100	112.5	125	137.5	150	162.5	175
固定孔距	B	39	51.5	64	76.5	89	101.5	114	126.5	139	151.5	164


T3059-□P

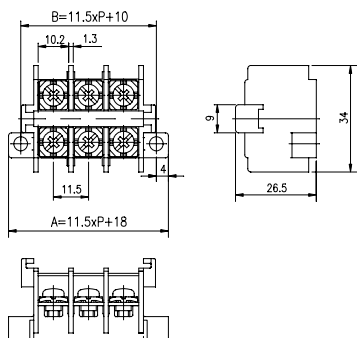

定格 Rating	AC600V 30A
適合電線 Applicable Wire	3.5mm ²
本体材質 Body Material	PBT G30%
連接方式 Connection	M4 Screw- M4 Screw

※可選配透明蓋
Optional cover available

※基座固定孔位可選擇
Other positions of fastening hole available



極數	P	3	4	6	8	10	12
全長	A	52.5	64	87	110	133	156
固定孔距	B	44.5	56	79	102	125	148