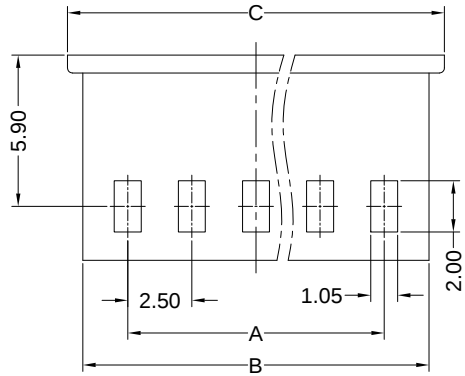
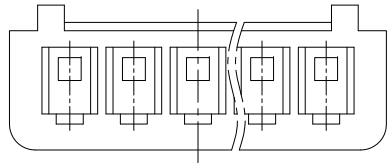


■ Specifications(规格) :


- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2.5A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000M\Omega$
- Contact resistance(接触电阻): $\leq 10m\Omega$
- After environmental testing(环境测试后): $\leq 20m\Omega$




2565 H X-XX X-N2 XX
① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别:
H-HSG
- ③ 外观形态:
空码-普通
- ④ PIN数或防呆KEY形态:
单排-XX
- ⑤ 塞PIN及特殊码
- ⑥ 材质:
N2-PA66 94V-2
- ⑦ 颜色:
空码-本色或普通色


Poles	Dimensions (mm)		
	A	B	C
2	2.50	6.00	7.20
3	5.00	8.50	9.70
4	7.50	11.00	12.20
5	10.00	13.50	14.70
6	12.50	16.00	17.20
7	15.00	18.50	19.70
8	17.50	21.00	22.20
9	20.00	23.50	24.70
10	22.50	26.00	27.20
11	25.00	28.50	29.70
12	27.50	31.00	32.20
13	30.00	33.50	34.70
14	32.50	36.00	37.20
15	35.00	38.50	39.70
16	37.50	41.00	42.20
17	40.00	43.50	44.70
18	42.50	46.00	47.20
19	45.00	48.50	49.70
20	47.50	51.00	52.20

2565H-XX-N2	Nylon 66 UL 94V-2	2565T	2565W
PART NO	Material	Suitable CSWB Terminal	Mates With CSWB Wafer


							GENERAL TOLERANCE .X ± 0.30 .XX ± 0.20 .XXX ± 0.10	上海高霖电子有限公司				PART NO. 2565H-XX-N2			
2015/05/08	B	C		Modify drawing frame format	jian.He							TITLE 2.50 mm Crimp Style connectors			
2011/09/08	A	B		Modify drawing frame format				APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	SUCCESS	孙开宝	刘艳	2007/07/19	MM	1/1	A-106	C

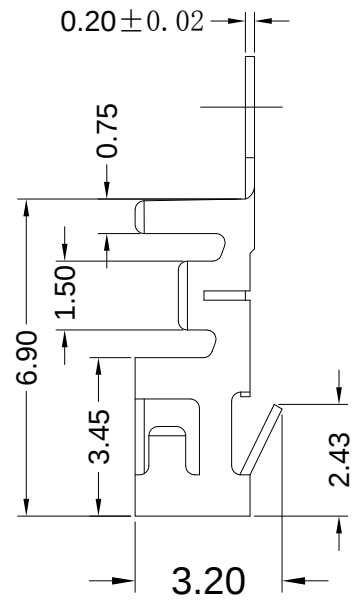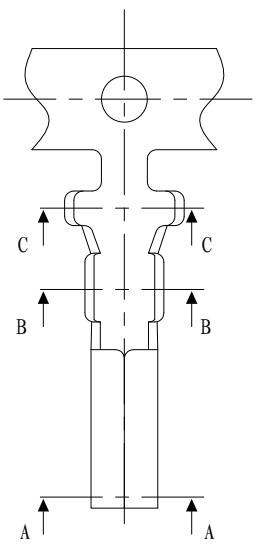

C-C SEC.



B-B SEC.



A-A SEC.



- Specifications(规格) :
- Voltage rating(额定电压): 250V AC / DC
 - Current rating(额定电流): 2.5A AC / DC
 - Withstanding voltage(耐压值): 1000V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤20mΩ
 - After environmental testing(环境测试后): ≤30mΩ

2565 T X-X SN X-X
① ② ③ ④ ⑤ ⑥ ⑦

- ①系列
②类别:
T-端子
③外观形态:
空码-普通脚
④材质:
P-磷铜 B-黄铜
⑤电镀类别:G**-镀金 V**-镀全金
*01-Gold Flash" *02-2U" *03-3U" *05-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
SN-镀亮锡(120U"Min.) 1-化学研磨
0-素材 SW-镀雾锡
⑥电镀方式:
空码-先冲后镀 B-先镀后冲
⑦模号/MARK及特殊码



2565T-BSN	Brass	AWG#22-28	1.75mm(Max)	Stamping Before Plating:30~50u" Ni;70~120u"Sn	2565H
2565T-PSN	Phosphor Bronze				
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In CSWB Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	上海高霖电子有限公司				PART NO. 2565T-XSN			
												TITLE 2.50 mm Crimp Style connectors			
2015/05/08	A	B		Modify drawing frame format	jian.He			APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	SUCCESS	孙开宝	刘艳	2007/07/19	MM	1/1	A-106	B

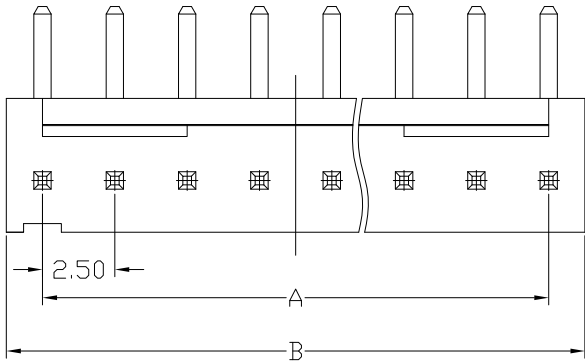

Specifications(规格) :

- Voltage rating(额定电压) : 250V AC / DC
- Current rating(额定电流) : 2.5A AC / DC
- Withstanding voltage(耐压值) : 800V AC/minute
- Temperature range(工作温度) : -25°C~+85°C
- Insulation resistance(绝缘电阻) : ≥1000MΩ
- Contact resistance(接触电阻) : ≤10mΩ
- After environmental testing(环境测试后) : ≤20mΩ

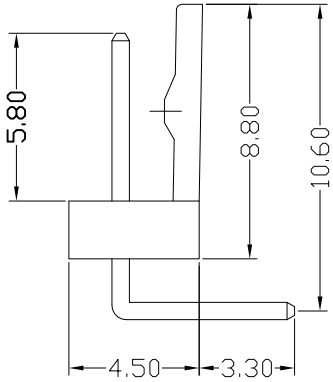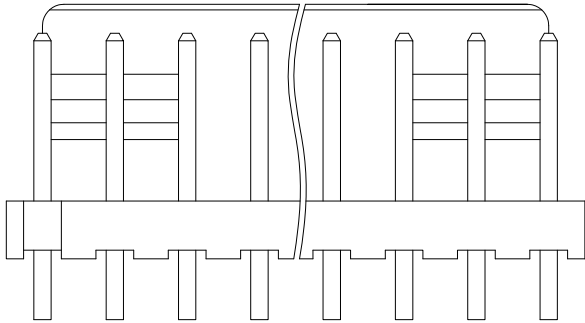



2565 W R X-XX X-N2 SN XX

- ①系列
- ②类别: W-WAFER类
- ③外观形态:
R-90° (带脚式)
- ④成型方式:
空码-DIP
- ⑤PIN数:
单排-XX
- ⑥塞PIN及特殊码
- ⑦材质:
N2-PA66 94V-2
- ⑧电镀类别:G**-镀金 V**-镀全金
*01-1U" *02-2U" *03-3U" *05-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
SN-镀亮锡(70-120U") SN1-镀亮锡(120U"Min.)
SW-镀雾锡 HS-高温锡
- ⑨颜色:
空码-本色或普通色



Poles	Dimensions (mm)	
	A	B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

2565WR-XX-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	2565H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With CSWB Housing	Q' ty/Bag

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	上海高霖电子有限公司				PART NO. 2565WR-XX-N2SN			
												TITLE 2.50 mm Crimp Style connectors			
2015/05/08	A	B		Modify drawing frame format	jian.He			APPROVAL	CHECK	DRAWN	DATA				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL		PROJECT 	SUCCESS	孙开宝	刘艳	2007/05/03	UNIT MM	SCALE 1/1	NUMBER A-106

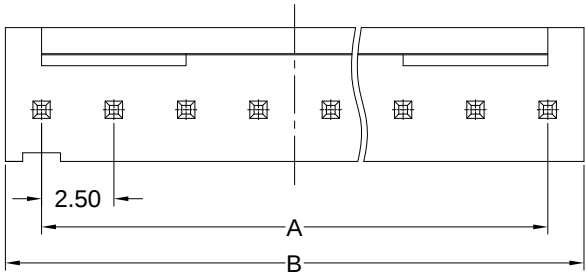

- Specifications(规格) :
- Voltage rating(额定电压) : 250V AC / DC
 - Current rating(额定电流) : 2.5A AC / DC
 - Withstanding voltage(耐压值) :800V AC/minute
 - Temperature range(工作温度) : -25℃~+85℃
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻) : ≤10mΩ
 - After environmental testing(环境测试后) : ≤20mΩ

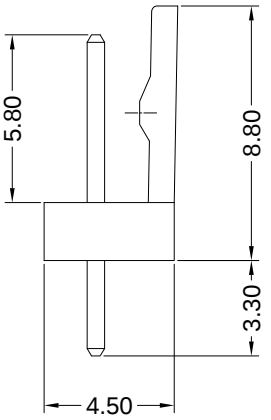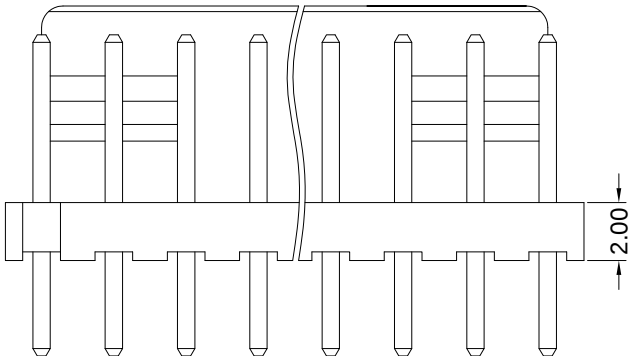

2565 W V X-XX X-N2 SN XX

- ①系列
- ②类别: W-WAFER类
- ③外观形态:
V=180°
- ④成型方式:
空码-DIP
- ⑤PIN数:
单排-XX
- ⑥塞PIN及特殊码
- ⑦材质:
N2-PA66 94V-2
- ⑧电镀类别:G**-镀金 V**-镀全金
*01-1U" *02-2U" *03-3U" *05-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
SN-镀亮锡 (70-120U") SN1-镀亮锡 (120U"Min.)
SW-镀雾锡 HS-高温锡
- ⑨颜色:
空码-本色或普通色

Poles	Dimensions (mm)	
	A	B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

2565WV-XX-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	2565H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With CSWB Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	上海高霖电子有限公司				PART NO. 2565WV-XX-N2SN			
												TITLE 2.50 mm Crimp Style connectors			
2015/05/08	2015/05/08	2015/05/08		Modify drawing frame format	jian.He				APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	SUCCESS	孙开宝	刘艳	2007/05/03	MM	1/1	A-106	B