

# Specifications

备注 (Remark)

## 1. 材料 (MATERIAL)

胶芯: LCP+30%G. F UL94V-0, 颜色: 黑色.

Housing: LCP+30%G. F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL  
30u" MIN NICKEL UNDERPLATING OVER ALL

## 2. 特性 (characteristics):

额定电流: 7 AMP

Rating Current: 7 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.

Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

# Ordering Information

F889-11 XX XX D SU AX

NO. OF PINS  
PER ROW  
1-20P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

INSULATOR

MATERIAL:

D:LCP

PACKING





A:PE Bag

B:Tape & Reel

C:Tube

D:Tube+CAP

E:Tray

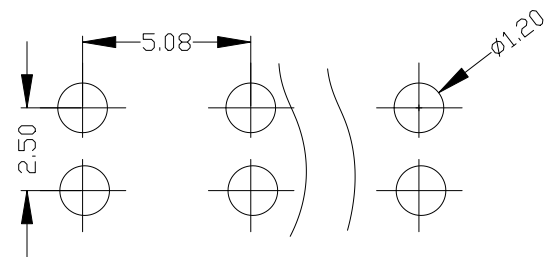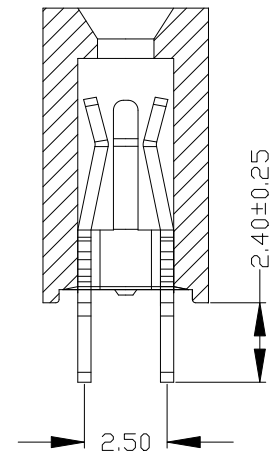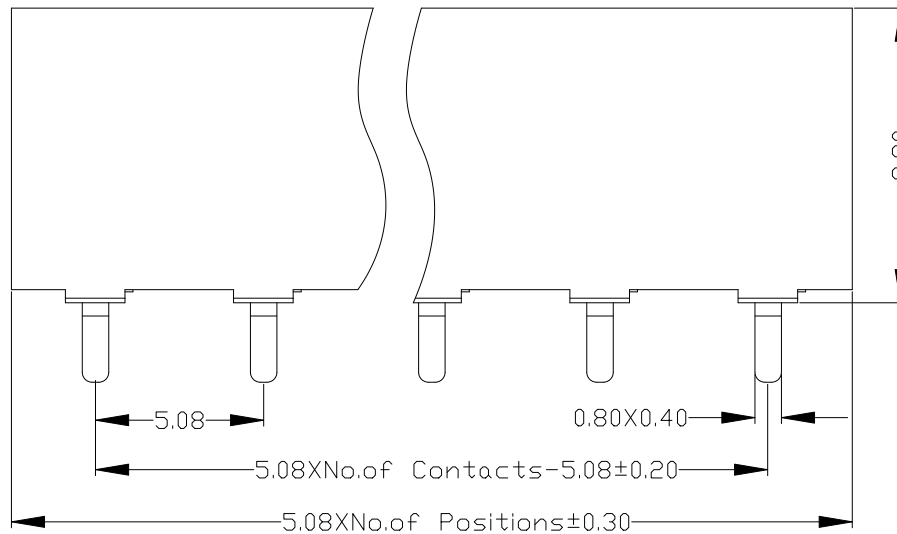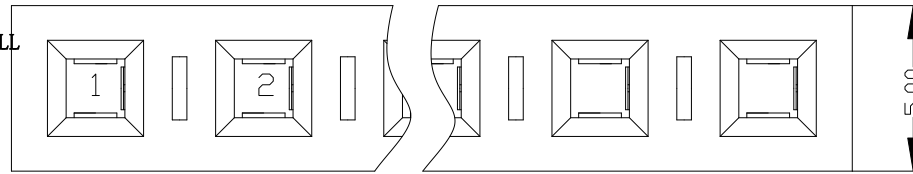

上海高霖电子有限公司

				OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强 PART NO. F889-11XXXXDSUX1 TITLE: 5.08mm 单排母 塑高8.9 180度 U型 Customer No.			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN					
				X.XXX	±0.10	SHEET	1/1	CHECK					
				Angle	±3°	PROJ.	☉	APPROVE					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL						