


Right socket connector:solder tail
single row
Availability from:2 to 50 contacts
Standard number of contacts 25 and
50

Right socket connector:solder tail
double row
Availability from:4 to 100 contacts
Standard number of contacts 50 and
100

Right socket connector:solder tail
double row with 2.54mm row to row
distance
Availability from:4 to 100 contacts
Standard number of contacts 100

Right socket connector:solder tail
triple row
Availability from:6 to 150 contacts
Standard number of contacts 150

Ordering Information

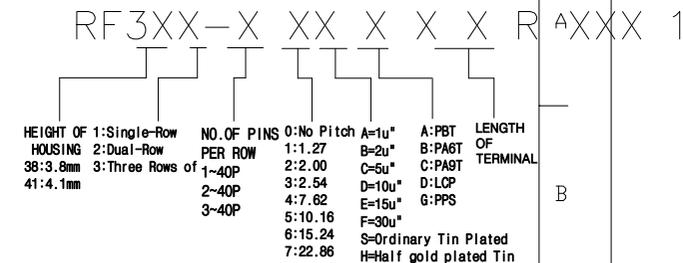

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
Flammability : UL94V-0
Sleeve : Brass CuZn 36Pb3(36000)
Contact clip(3 finger) : Beryllium copper (C17200)
Mating pin Ø : 0.38 to 0.50 mm
Forces : (polished steel gauge Ø 0.41mm)
-Insertion : 0.5 N typ
-Withdrawal : 0.2 N typ
Mechanical life : min 500 cycles
Rated current : 1Amp
Contact resistance: Max 10mΩ
Dielectric resistance : Min 500V_{RMS}

| | | | | | | | | | | | |
|-----|------|--------------------------|--------|-----------|-------|-------|-------|---------|------------|--------------|-------------------|
| | | | | OPERATION | | SCALE | | Fit | 上海高霖电子有限公司 | | |
| | | | | X.X | ±0.25 | UNIT | | MM | | | |
| | | | | X.XX | ±0.20 | SIZE | A4 | DESIGN | 卢小强 | PART NO. | RF3XX-XXXXXXRXXX1 |
| | | | | X.XXX | ±0.10 | SHEET | 1/1 | CHECK | | TITLE: | 1.27圆孔排母 90度 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | Angle | ±3° | PROJ. | APPROVE | | Customer No. | |