


Straight socket connector low profile height 2.8mm: solder tail, double row, low profile
 Availability from: 2 to 40 contacts
 Standard number of contacts 40


Ordering Information

RF228-X XX X X X S AX

HEIGHT OF HOUSING	1: Single-Row 2: Dual-Row 3: Three Rows of	NO. OF PINS PER ROW	0: No Pitch 1: 1.27 2: 2.00 3: 2.54 4: 7.62 5: 10.16 6: 15.24 7: 22.86	A=1u" B=2u" C=5u" D=10u" E=15u" F=30u"	A: PBT B: PA6T C: PA9T D: LCP G: PPS H: Half gold plated Tin	LENGTH OF TERMINAL
-------------------	--	---------------------	---	---	---	--------------------

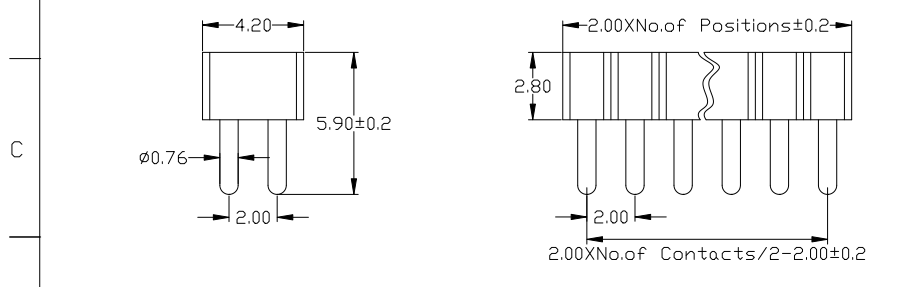


Straight socket connector low profile height 2.8mm: solder tail, double row, low profile
 Availability from: 2 to 80 contacts
 Standard number of contacts 80

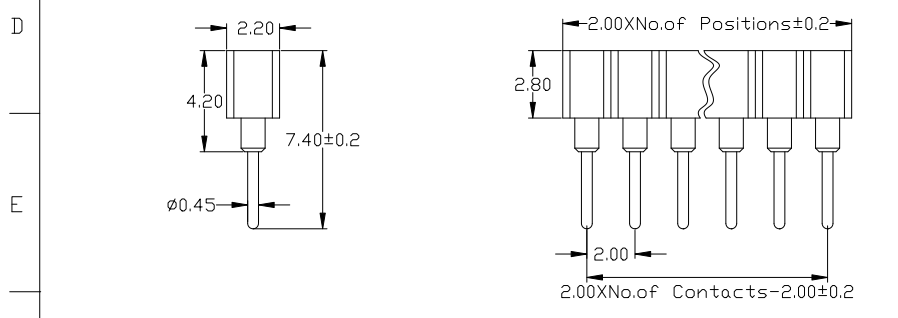

Straight socket connector height 4.2mm: solder tail,
 Availability from: 2 to 40 contacts
 Standard number of contacts 40


Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact cilp (6 finger) : Beryllium copper (C17200)
 Mating pin Ø : 0.40 to 0.66 mm or 0.50SQ
 Forces : (polished steel gauge Ø0.46mm)
 -Insertion : 0.7 N typ.
 -Withdrawal : 0.4N typ.
 Mechanical life : min 500 cycles
 Rated current : 3Amp
 Contact resistance: Max 10mΩ
 Dielectric resistance : Min 1000V_{RMS}

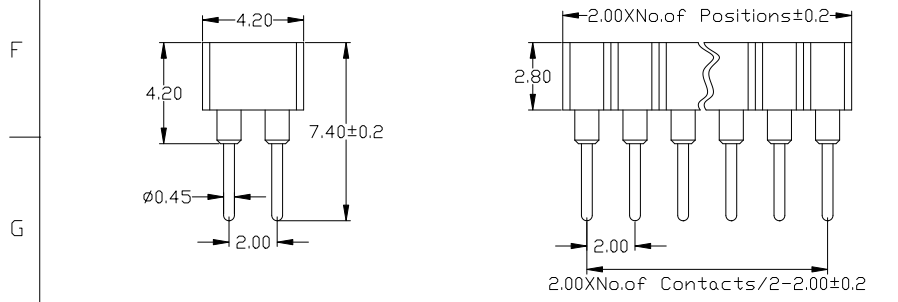

Straight socket connector height 4.2mm: solder tail,
 Availability from: 4 to 80 contacts
 Standard number of contacts 80

				OPERATION		SCALE		Fit		上海高霖电子有限公司			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RF228-XXXXXXSXXX1		
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	2.0圆孔排母 塑高2.8 180度		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.			

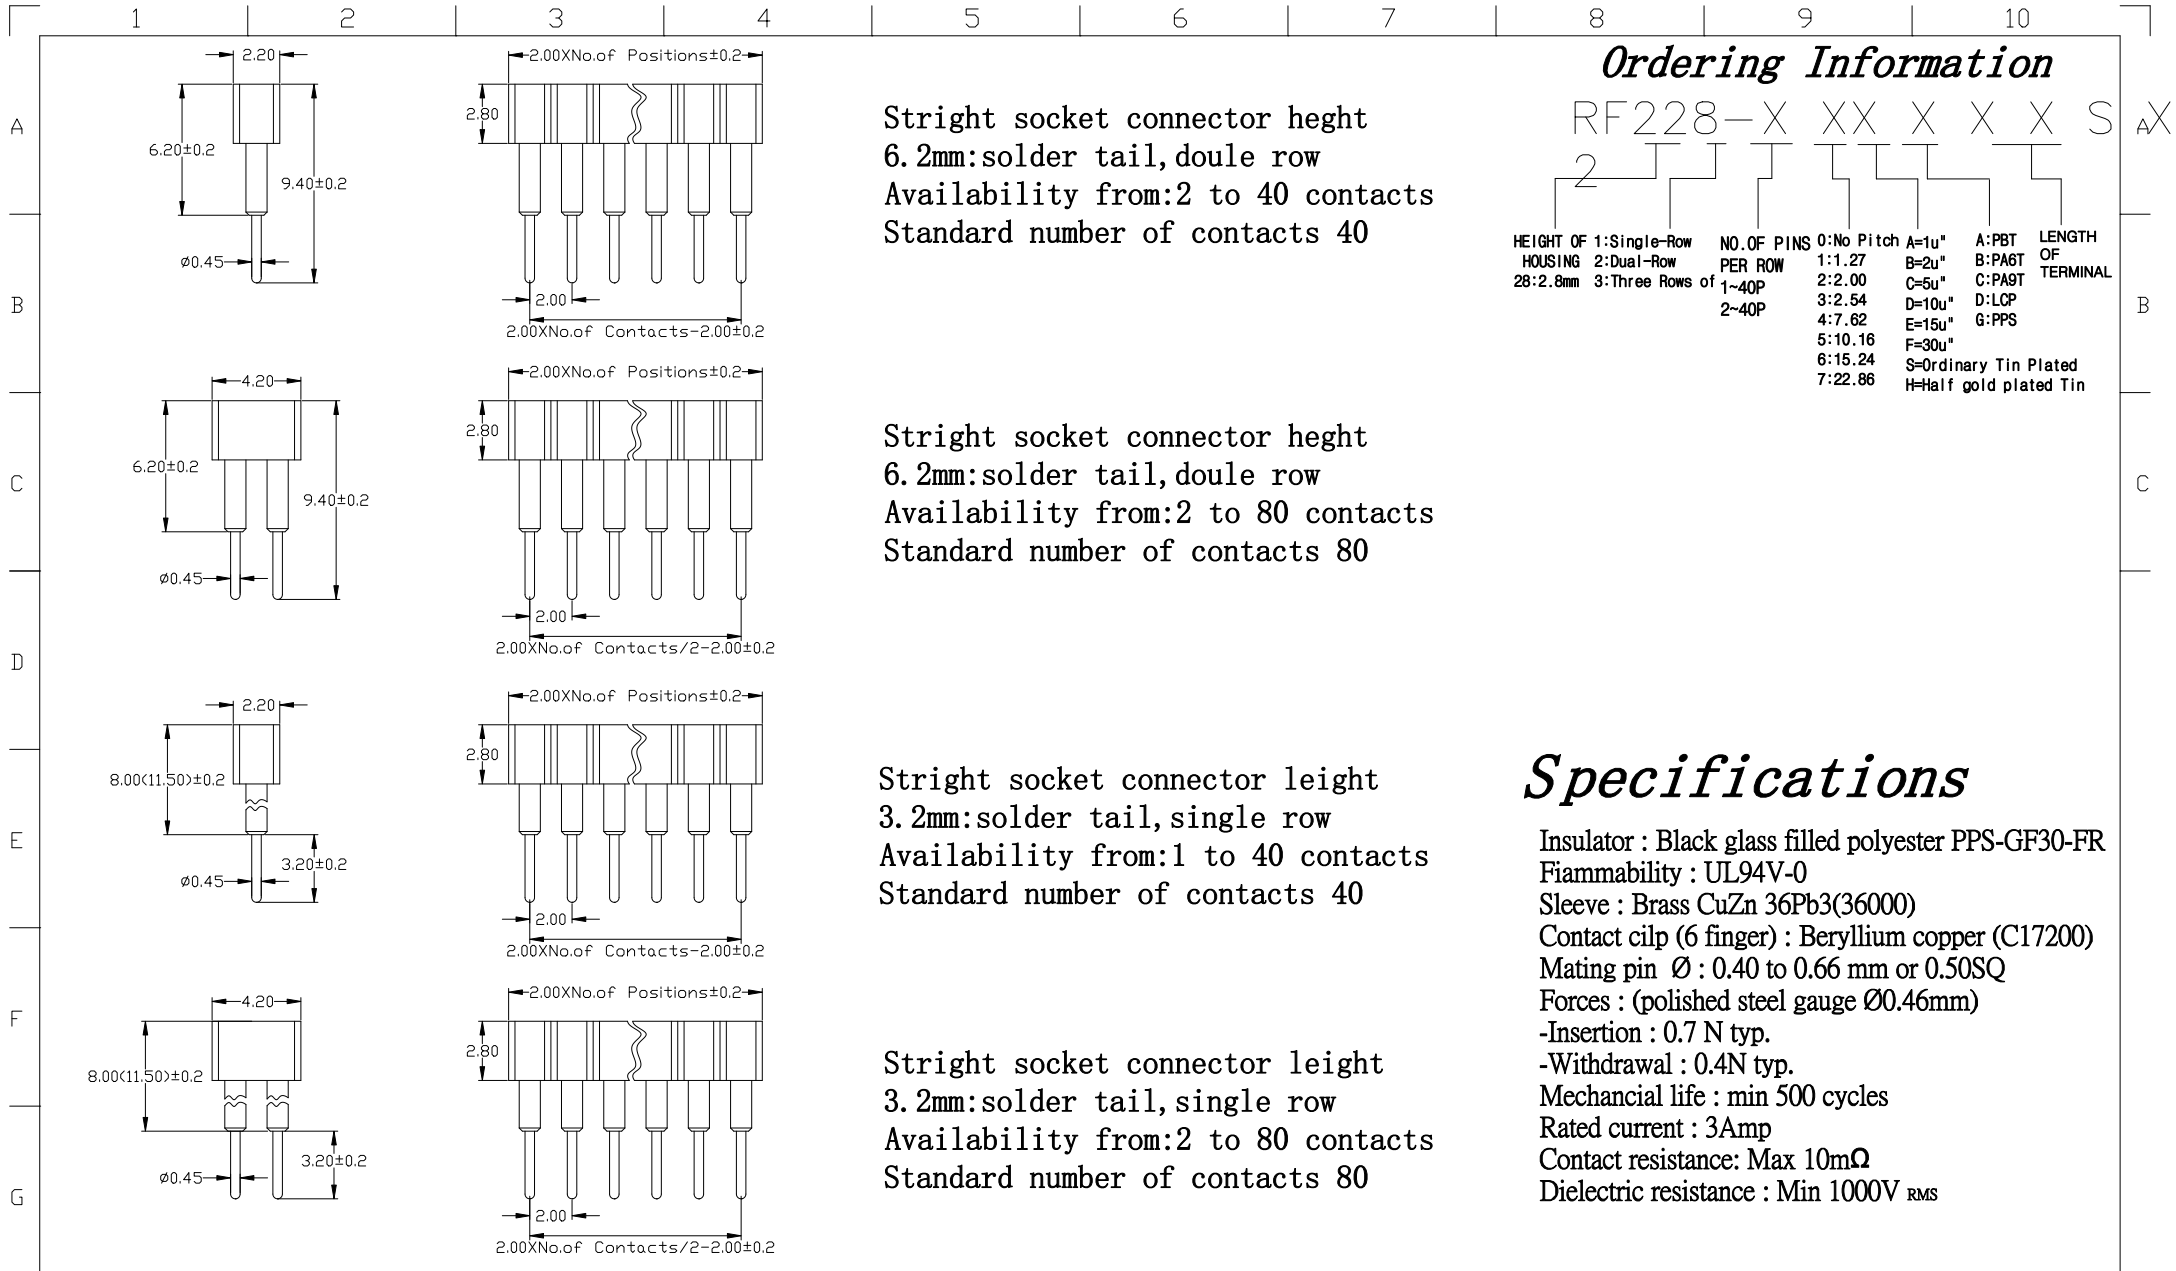


Straight socket connector height
 6.2mm:solder tail, double row
 Availability from:2 to 40 contacts
 Standard number of contacts 40

Straight socket connector height
 6.2mm:solder tail, double row
 Availability from:2 to 80 contacts
 Standard number of contacts 80

Straight socket connector height
 3.2mm:solder tail, single row
 Availability from:1 to 40 contacts
 Standard number of contacts 40

Straight socket connector height
 3.2mm:solder tail, single row
 Availability from:2 to 80 contacts
 Standard number of contacts 80

Ordering Information

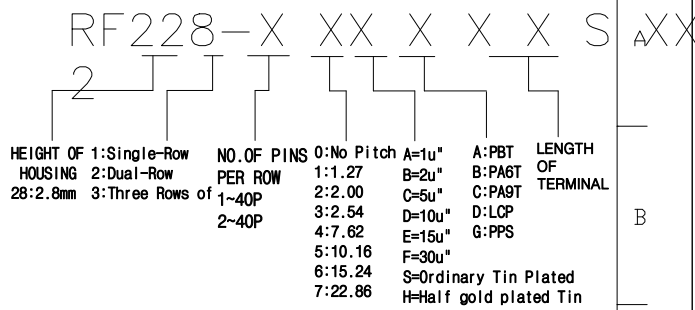

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR
 Flammability : UL94V-0
 Sleeve : Brass CuZn 36Pb3(36000)
 Contact clip (6 finger) : Beryllium copper (C17200)
 Mating pin Ø : 0.40 to 0.66 mm or 0.50SQ
 Forces : (polished steel gauge Ø0.46mm)
 -Insertion : 0.7 N typ.
 -Withdrawal : 0.4N typ.
 Mechanical life : min 500 cycles
 Rated current : 3Amp
 Contact resistance: Max 10mΩ
 Dielectric resistance : Min 1000V_{RMS}

				OPERATION		SCALE		Fit		上海高霖电子有限公司 卢小强			
				X.X	±0.25	UNIT		MM					
				X.XX	±0.20	SIZE	A4	DESIGN	PART NO.		RF228-XXXXXXSXXX2		
				X.XXX	±0.10	SHEET	1/1	CHECK	TITLE:		2.0圆孔排母 塑高2.8 180度		
				Angle	±3°	PROJ.	☉	APPROVE	Customer No.				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL							
1													