




EL 1H




Pitch:3.81(3.5) mm




EL 1A




Pitch:3.81(3.5) mm

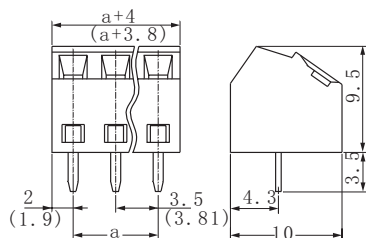

EL 1HT2L



Pitch:3.81(3.5) mm

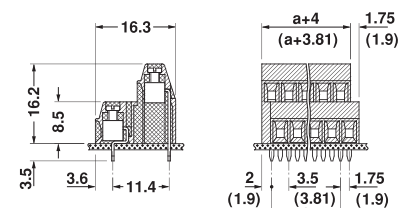

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-1.5	0.14-1	26-16	13.5	160
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	160				
额定冲击电压(kV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M2/0.22-0.25				
剥线长度(mm)	5				
线路板孔径(mm)	Ø 1.1				
引脚尺寸 (mm)	0.5x0.9				

UL 数据

额定电压(V)/电流(A)	300/10
压线范围(AWG)	30-16

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-1.5	0.14-1	26-16	13.5	160
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	160				
Rate impulse Voltage(kV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M2/0.22-0.25				
Stripping length(mm)	5				
PCB Hole Diameter(mm)	Ø 1.1				
Pin Dimensions(mm)	0.5x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/10
Wire Range(AWG)	30-16

位数/No. of positions	订货型号/Order No.
2	EL 1H-2-3.5
...	...
24	EL 1H-24-3.5
2	EL 1H-2-3.81
...	...
24	EL 1H-24-3.81

55 angled connection					
IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-1.5	0.14-1	26-16	13.5	160
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	160				
额定冲击电压(kV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M2/0.22-0.25				
剥线长度(mm)	5				
线路板孔径(mm)	Ø 1.1				
引脚尺寸 (mm)	0.5x0.9				

UL 数据

额定电压(V)/电流(A)	300/10
压线范围(AWG)	30-16

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-1.5	0.14-1	26-16	13.5	160
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	160				
Rate impulse Voltage(kV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M2/0.22-0.25				
Stripping length(mm)	5				
PCB Hole Diameter(mm)	Ø 1.1				
Pin Dimensions(mm)	0.5x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/10
Wire Range(AWG)	30-16

位数/No. of positions	订货型号/Order No.
2	EL 1A-2-3.5
...	...
24	EL 1A-24-3.5
2	EL 1A-2-3.81
...	...
24	EL 1A-24-3.81

Each position with 2 poles					
IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14-1.5	0.14-1	26-16	13.5	160
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	160				
额定冲击电压(kV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	M2/0.22-0.25				
剥线长度(mm)	5				
线路板孔径(mm)	Ø 1.1				
引脚尺寸 (mm)	0.5x0.9				

UL 数据

额定电压(V)/电流(A)	300/10
压线范围(AWG)	30-16

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14-1.5	0.14-1	26-16	13.5	160
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	160				
Rate impulse Voltage(kV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	M2/0.22-0.25				
Stripping length(mm)	5				
PCB Hole Diameter(mm)	Ø 1.1				
Pin Dimensions(mm)	0.5x0.9				

UL Technical Data

Rate Voltage(V)/Current(A)	300/10
Wire Range(AWG)	30-16

位数/No. of positions	订货型号/Order No.
2	EL 1HT2L-2-3.5
3	EL 1HT2L-3-3.5
2	EL 1HT2L-2-3.81
3	EL 1HT2L-3-3.81