



ES 0.5HT



Pitch:2.54 mm



IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14~0.5	0.14~0.5	26~20	6	63
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	63				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	\				
剥线长度(mm)	11				
线路板孔径(mm)	Ø 1.1				
引脚尺寸 (mm)	0.5x0.8				

UL 数据

额定电压(V)/电流(A)	150/6
压线范围(AWG)	26~20


IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14~0.5	0.14~0.5	26~20	6	63
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	63				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	\				
Stripping length(mm)	11				
PCB Hole Diameter(mm)	Ø 1.1				
Pin Dimensions(mm)	0.5x0.8				

UL Technical Data


Rate Voltage(V)/Current(A)	150/6
Wire Range(AWG)	26~20

位数/No. of positions	订货型号/Order No.
2	ES 0.5HT-2-2.54
...	...
24	ES 0.5HT-24-2.54

ES 0.5VT



Pitch:2.54 mm



IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.14~0.5	0.14~0.5	26~20	6	63
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	63				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	\				
剥线长度(mm)	11				
线路板孔径(mm)	Ø 1.1				
引脚尺寸 (mm)	0.5x0.8				

UL 数据

额定电压(V)/电流(A)	150/6
压线范围(AWG)	26~20


IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.14~0.5	0.14~0.5	26~20	6	63
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	63				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	\				
Stripping length(mm)	11				
PCB Hole Diameter(mm)	Ø 1.1				
Pin Dimensions(mm)	0.5x0.8				

UL Technical Data


Rate Voltage(V)/Current(A)	150/6
Wire Range(AWG)	26~20

位数/No. of positions	订货型号/Order No.
2	ES 0.5VT-2-2.54
...	...
24	ES 0.5VT-24-2.54

ES 1A



Pitch:5.08 mm

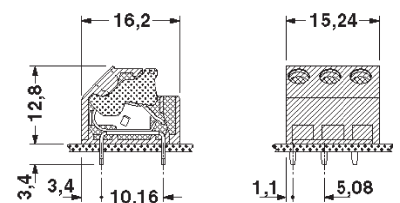

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	0.2~1.5	0.2~1	24~16	12	250
绝缘材料组别	I				
污染等级	3				
过电压类别	III				
额定电压(V)	250				
额定冲击电压(KV)	2.5				
绝缘材料/阻燃等级 UL 94	PA/V0				
螺钉/扭矩(-Nm)	\				
剥线长度(mm)	10				
线路板孔径(mm)	Ø 1.3				
引脚尺寸 (mm)	0.5x0.8				

UL 数据

额定电压(V)/电流(A)	150/6
压线范围(AWG)	26~20

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	0.2~1.5	0.2~1	24~16	12	250
Insulating Material Group	I				
Pollution degree	3				
Overvoltage Category	III				
Rate Voltage(V)	250				
Rate impulse Voltage(KV)	2.5				
Insulating material/Inflammability Class	PA/V0				
Screw/Torque(-Nm)	\				
Stripping length(mm)	10				
PCB Hole Diameter(mm)	Ø 1.3				
Pin Dimensions(mm)	0.5x0.8				

UL Technical Data

Rate Voltage(V)/Current(A)	150/6
Wire Range(AWG)	26~20

位数/No. of positions	订货型号/Order No.
2	ES 1A-2-5.08
...	...
24	ES 1A-24-5.08