



S 2.5IVG



Pitch: 5.08 mm

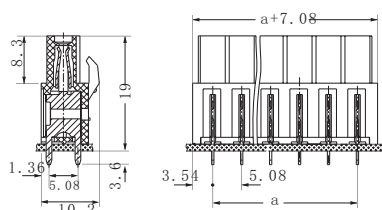

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				I	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	630
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				Ø1.4	
引脚尺寸 (mm)				1.3x0.7	

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	\


IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				I	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			250	320	630
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				Ø1.4	
Pin Dimensions(mm)				1.3x0.7	

UL Technical Data


Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	\

位数/No. of positions	订货型号/Order No.
2	S 2.5IVG-2-5.08
...	...
24	S 2.5IVG-24-5.08

S 2.5IVF



Pitch: 5.08 mm

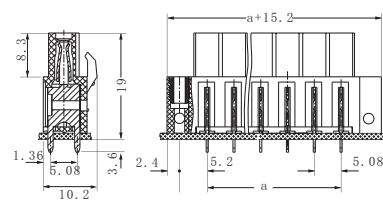

IEC 数据	刚性导线 (mm ²)	柔性导线 (mm ²)	AWG	I (A)	U (V)
连接数据	\	\	\	12	250
绝缘材料组别				I	
污染等级			3	2	2
过电压类别			III	III	II
额定电压(V)			250	320	630
额定冲击电压(KV)				4	
绝缘材料/阻燃等级 UL 94				PA/V0	
螺钉/扭矩(-Nm)				\	
剥线长度(mm)				\	
线路板孔径(mm)				Ø1.4	
引脚尺寸 (mm)				1.3x0.7	

UL 数据

额定电压(V)/电流(A)	300/15
压线范围(AWG)	\

IEC Technical Data	Rigid (mm ²)	flexible (mm ²)	AWG	I (A)	U (V)
Connection data	\	\	\	12	250
Insulating Material Group				I	
Pollution degree			3	2	2
Overvoltage Category			III	III	II
Rate Voltage(V)			250	320	630
Rate impulse Voltage(KV)				4	
Insulating material/Inflammability Class				PA/V0	
Screw/Torque(-Nm)				\	
Stripping length(mm)				\	
PCB Hole Diameter(mm)				Ø1.4	
Pin Dimensions(mm)				1.3x0.7	

UL Technical Data

Rate Voltage(V)/Current(A)	300/15
Wire Range(AWG)	\

位数/No. of positions	订货型号/Order No.
2	S 2.5IVF-2-5.08
...	...
24	S 2.5IVF-24-5.08