



PM 13
接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

600V, 30A
18~10 AWG
M4, 18Kgf c m
PBT, UL94 V0
AC2000, 1Min.
1000MΩ, DC500V
-40℃~+130℃

PM 13

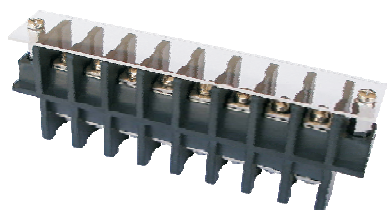

How to Order

PM13 — 位数
Positions
2 to 10



PM 16
接线端子参数

额定电参数
压线范围
螺钉力矩
外壳
工频耐电压
绝缘抵抗
使用温度

Rating
Wire Range
Screw/Torque Rating
Insulator Body
Insulation withstand Voltage
Insulation Resistance
Operating Temperature

600V, 75A
10~3 AWG
M6, 57Kgf c m
PBT, UL94 V0
AC3000, 1Min.
1000MΩ, DC500V
-40℃~+130℃

PM 16

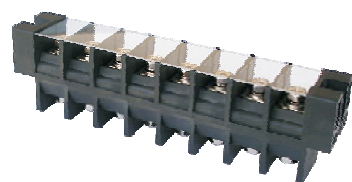

How to Order

PM16 — 位数
Positions
2 to 15