
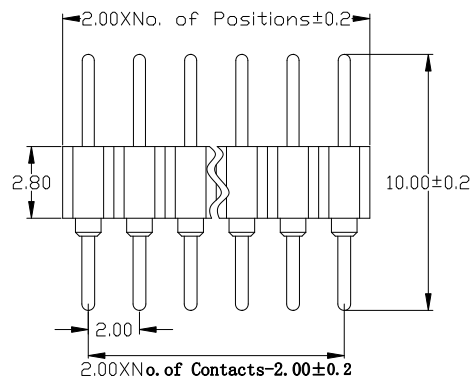






Ordering Information

RP228-X XX X X X S_A10

HEIGHT OF HOUSING	1:Single-Row	NO.OF PINS PER ROW	0:No Pitch	A=1u"	A:PBT	LENGTH OF TERMINAL
28:2.8mm	2:Dual-Row	1~40P	1:1.27	B=2u"	B:PA6T	
	3:Three Rows of		2:2.00	C=5u"	C:PA9T	
			3:2.54	D=10u"	D:LCP	
			4:7.62	E=15u"	G:PPS	
			5:10.16	F=30u"		
			6:15.24	S=Ordinary Tin Plated		
			7:22.86	H=Half gold plated Tin		

Stright socket connector:solder tail
single row
Availability from:2 to 40 contacts
Standard number of contacts 40

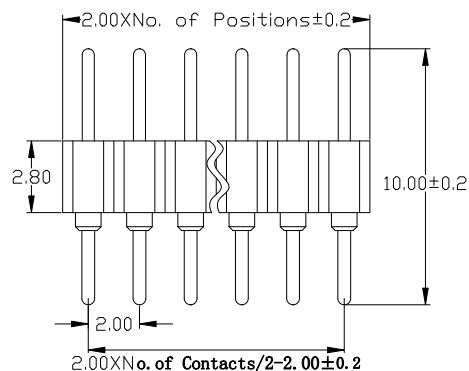

Specifications

Insulator : Black glass filled polyester PPS-GF30-FR

Fiammability : UL94V-0

Sleeve : Brass CuZn 36Pb3(36000)

Mating pin $\varnothing : 0.45 \text{ mm}$

Mechanical life : min 500 cycles

Rated current : 1Amp

Contact resistance: Max 10mΩ

Dielectric resistance : Min 1000V_{RMS}

Stright socket connector:solder tail
double row
Availability from:4 to 80 contacts
Standard number of contacts 80

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	RP228-XXXXXXS1001
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.0圆孔排针 塑高2.8 180度 L=10.0
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	