

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN

Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Raring Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to+105°C

Temperture Range: -40°C to+105°C

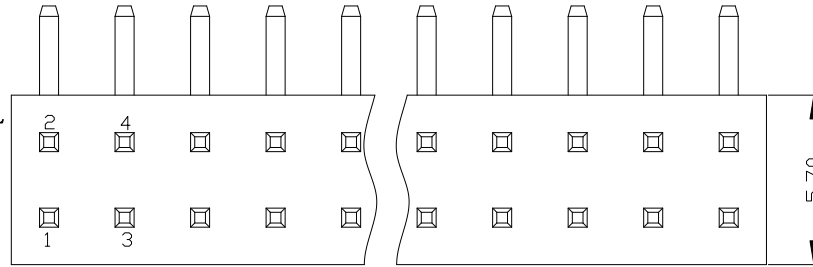

Ordering Information

P143-12 XX XX X R XXXA X

HEIGHT OF
HOUSING
43:4.30mm

NO.OF PINS
PER ROW
2~40P

Contact Plating
Full Of Gold

Semi-gold

INSULATOR
MATERIAL:

LENGTH
OF
TERMINAL

PACKING
A:PE Bag
B:Tape & Reel
C:Tube
D:Tube+CAP
E:Tray

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

B0=0.8U"

B1=1U"

B2=1.5U"

B3=2U"

B4=3U"



B5=5U"

B6=10U"

B7=15U"

B8=20U"

B9=30U"

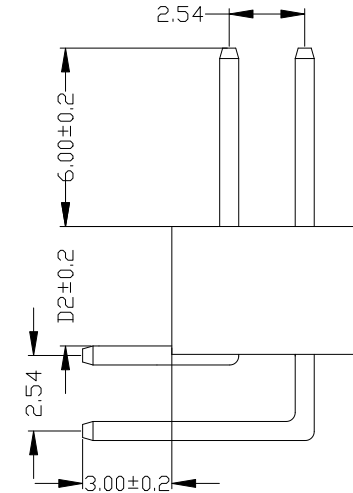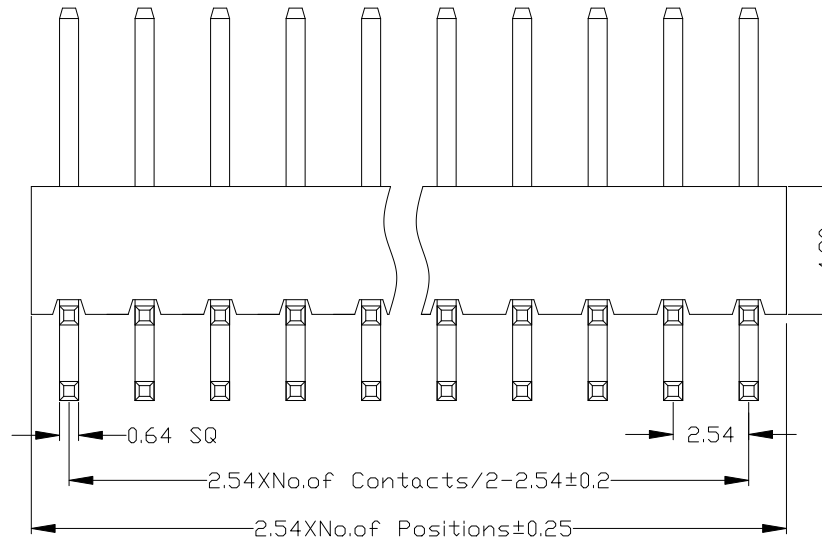

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

P143-12XXXXXXRXXXX1

2.54mm 双排针 塑高4.3 90度

REV DATE MODIFICATION DESCRIPTION CHANGE APPROVE

1 2 3 4 5 6 7 8 9 10