


T4033S-□P(PA8)



定 格 Rating	UL300V 20A VDE450V 17.5A
適合電線 Applicable Wire	1.5mm²
本体材質 Body Material	PA66
連接方式 Connection	M2.6 Screw- M2.6 Screw

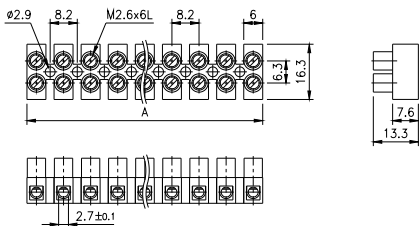


極數	P	1	2	3	4	5	6	7	8	9	10	11	12
全長	A	6.0	14.2	22.4	30.6	38.8	47.0	55.2	63.4	71.6	79.8	88.0	96.2

T4043S-□P(PA10)



定 格 Rating	UL300V 30A VDE450V 24A
適合電線 Applicable Wire	2.5mm²
本体材質 Body Material	PA66
連接方式 Connection	M3 Screw- M3 Screw

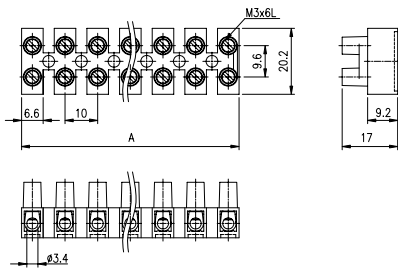


極數	P	1	2	3	4	5	6	7	8	9	10	11	12
全長	A	6.3	16.3	26.3	36.3	46.3	56.3	66.3	76.3	86.3	96.6	106.3	116.3

T4048S-□P(1000DS)



定 格 Rating	UL250V 40A VDE500V 41A
適合電線 Applicable Wire	6mm²
本体材質 Body Material	PA6
連接方式 Connection	M3.5 Screw- M3.5 Screw


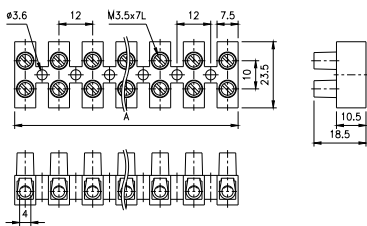


極數	P	1	2	3	4	5	6	7	8	9	10	11	12
全長	A	7.5	19.5	31.5	43.5	55.5	67.5	79.5	91.5	103.5	115.5	127.5	139.5

T4049S-□P(PA14)



定 格 Rating	UL300V50A VDE500V 57A
適合電線 Applicable Wire	10mm²
本体材質 Body Material	PA 66
連接方式 Connection	M4 Screw- M4 Screw

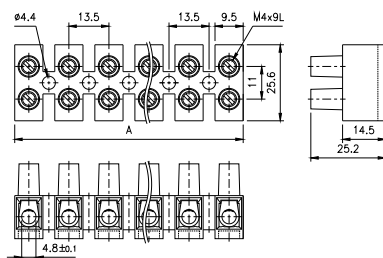

極數	P	1	2	3	4	5	6	7	8	9	10	11	12
全長	A	9.5	23.0	36.5	50.0	63.5	77.0	90.5	104.0	117.5	131.0	144.5	158.0

歐洲式
Europa Type