

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.




Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

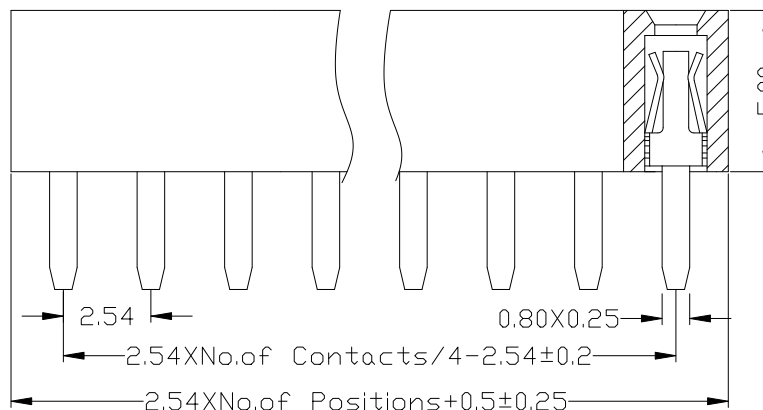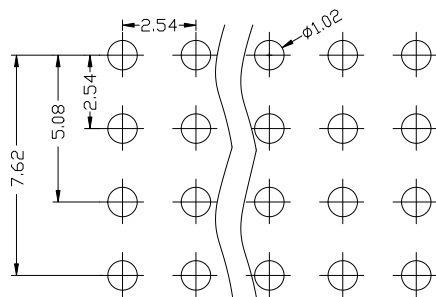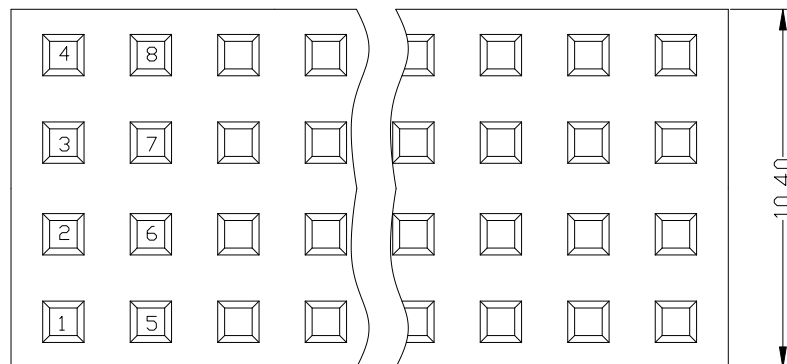

Ordering Information

F150-14 XX XX X SU AX

NO. OF PINS
PER ROW
4-40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

Semi-gold

B0=0.8u"

B1=1u"

B2=1.5u"

B3=2u"

B4=3u"

B5=5u"

B6=10u"

B7=15u"

B8=20u"

B9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP

PACKING


A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

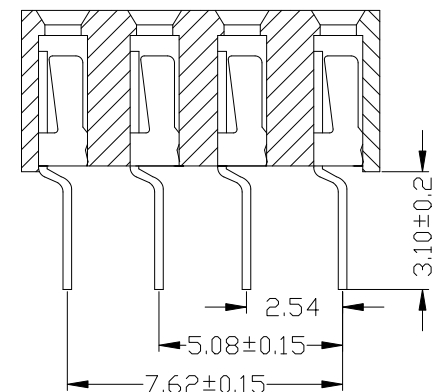

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

Φ

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

TITLE:

Customer No.

F150-14XXXXXSUX1

2.54 排母 四排 塑高5.0 180度

U型

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.	Φ	DESIGN	CHECK	APPROVE	Customer No.	U型
-----	------	--------------------------	--------	---------	-----	-----	-------	---	--------	-------	---------	--------------	----

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

Specifications

备注 (Remark)

1. 材料 (MATERIAL)

胶芯: PA6T/PBT+30%G.F UL94V-0, 颜色: 黑色.

Housing: PA6T/PBT+30%G.F UL94V-0, Color: Black

端子: 磷/青铜, 镍底30u"MIN, 表面镀金1u"MIN

Contact: Phosphor bronze, 1u"MIN GOLD PLATING OVER ALL

30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):

额定电流: 3 AMP

Rating Current: 3 AMP.

接触阻抗: 20 mΩ MAX.

Contact Resistance: 20 mΩ MAX.

绝缘阻抗: 1000 MΩ MIN.


Insulating Resistance: 1000 MΩ MIN.

耐电压: AC 500V.

Withstanding Voltage: AC 500V.

温度范围: -40°C to +105°C

Temperature Range: -40°C to +105°C

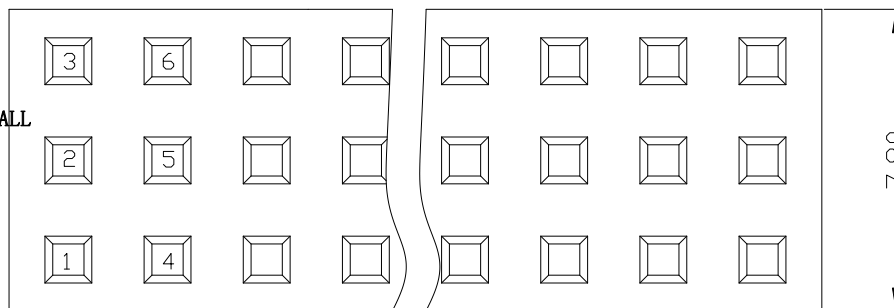

Ordering Information

F150-13 XX XX X SU AX

NO. OF PINS
PER ROW
3-40P

Contact Plating

Full Of Gold

A0=0.8u"

A1=1u"

A2=1.5u"

A3=2u"

A4=3u"

A5=5u"

A6=10u"

A7=15u"

A8=20u"

A9=30u"

S1=Ordinary Tin Plated

S2=Matte Tin Plated

S3=Tin-plated High-temperature

INSULATOR

MATERIAL:

A: PBT

B: PA6T

C: PA9T

D: LCP



A: PE Bag

B: Tape & Reel

C: Tube

D: Tube+CAP

E: Tray

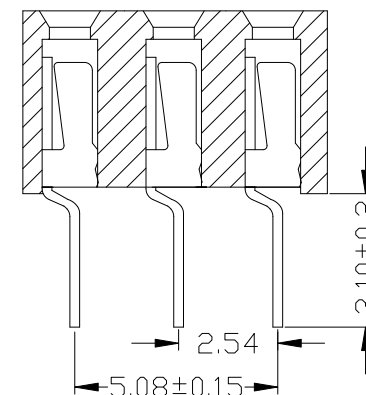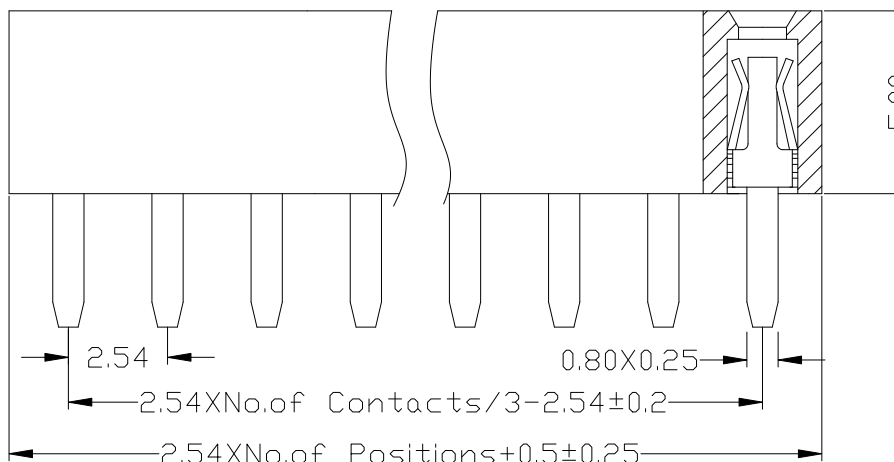

OPERATION

X.X ±0.25

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

SCALE

UNIT

SIZE

SHEET

PROJ.

Fit

MM

A4

1/1

DESIGN

CHECK

APPROVE

上海高霖电子有限公司

卢小强

PART NO.

F150-13XXXXXSUX1

TITLE:

2.54 排母 三排 塑高5.0 180度

Customer No.

U型

REV DATE

MODIFICATION DESCRIPTION

CHANGE

APPROVE

1

2

3

4

5

6

7

8

9

10

A

B

C

Temperture Range: -40°C to+105°C



H

~~A~~

PACKING
A:PE Bag
B:Tape &

C:Tube

D: Tube+C

E:Tray

					OPERATION		SCALE		Fit	上海高霖电子有限公司		
					X.X	±0.25	UNIT		MM			
					X.XX	±0.20	SIZE	A4	DESIGN	卢小强	PART NO.	F171-13XXXXXSUX1
					X.XXX	±0.10						
					Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54mm排母 塑高7.1 三排 180度
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	PROJ.		APPROVE		Customer No.	

上海高霖电子有限公司